


Sube up Tube

and scratch resistance.

Innovation of a tube with a smooth inner surface.

This polyolefin co-extrusion has a smooth inner surface because of its special coating.

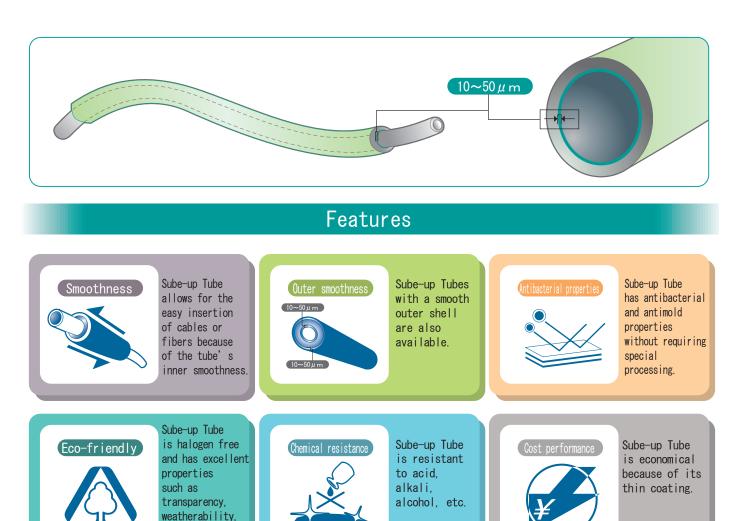

Applications

Sube-up Tube is widely used for making electronic parts, automobile parts, food processing equipment, etc.

HOTTY POLYMER Co., Ltd.

Head Office 4-43-8, Higashimukojima, Sumida-ku, Tokyo, 131-0032, Japan Kuki Factory 1-8, Kiyoku-kogyodanchi, Kuki, Saitama, 346-0035, Japan Pone, +81-3-3614-4100 Fax, 81-3-3614-4162 Pone, +81-480-21-5645 Fax, +81-480-23-5663

http://www.hotty.co.jp